SPECIFICATION 15 Oct 2019, V1


MPW0530 -5km 300Mbps Network Extender

WWW.MAG.COM.MY



Features

- 5km Line of Sight
- 300Mbps, 5.8GHz
- 10/100Mbps LAN port x2
- Pairing by Web or Dip Switch
- Recommend for Parameter Fencing, Factory, Warehouse, Golf Course, Car Park, Lake etc
- Active (Power Required) at both side transmitter & receiver side
- Support Point to Point Bridge / Point to Multi Bridge/ APMode
- 24VDC POE (Adapter Inc.)

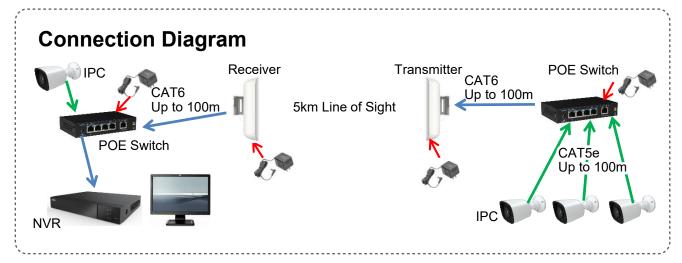

Dimension



Specification

- IEEE802.11n, 11a, 3u.
- Flash 8MB, DRAM 64MB
- Channel: 4900~6100MHz
- DC24V, 1A
- Power Consumption : <6W
- Operating Environment : -300~65oC / 0~95% Humidity
- ABS/PC Material with UV Protection
- Dimension & Weight :303(H) x 215(W) x 49(D)mm, 0.9kg
- Packing: 10pcs/ctn, 660x455x365, 16.5kg

© COPYRIGHT 2019. This documentation served as a reference only. It is subject to change without further notice. All the diagrams and information in this documentation may not be duplicated or modified in any form without the written approval from the management.