



Ensuring Your  
Peace of Mind.

## SPECIFICATION

6 OCT 2020, V1

### AR888ULS SOYAL QR code reader


WWW.MAG.COM.MY



#### Technical Parameters

Communication interface	WG26/34 / QR CODE
Output interface	Wiegand, RS485
User capacity	No
Supported frequency	Dual Band 125kHz & 13.56Mhz
QR reading distance	5 - 20cm ( adjust according to QR code size )
EM reading distance	5 - 15cm
Mifare	2 - 5cm
Relay Output	No
Relay Input	No
Scan rate	60 frame/sec
Indicator	LED ring on the edge Standby = green blinking Valid = green static Invalid = red static
Buzzer	Yes
Power voltage consumption	12DCV / <1W
Operating Temperature	-20°C to 65°C
Operating humidity	20% - 90%
Dimension	88mm(H) x 86mm(W) x 9mm(D)/34mm(D)
Housing	ABS
Color	Bright black

# Dimension

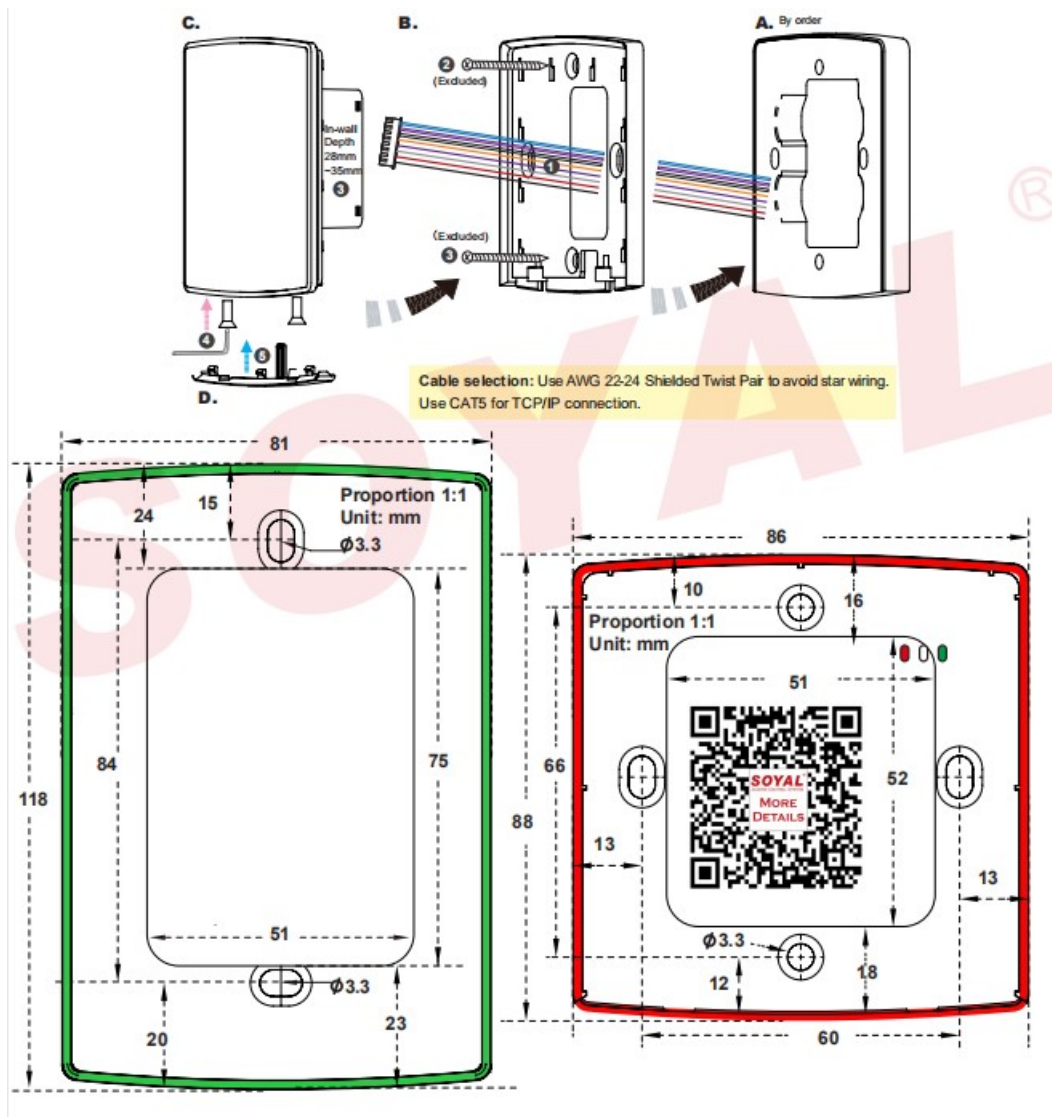

© COPYRIGHT 2020. This documentation served as a reference only. It is subject to change without further notice. All the diagrams and information in this documentation may not be duplicated or modified in any form without the written approval from the management.