



MORE SECURE,
MORE CONVENIENT.

SPECIFICATION

21 Feb 2020, V1

SLB220 Fully Automated Motorized Sliding Barrier



WWW.MAG.COM.MY



Technical Specification

Power Input	AC220 \pm 10% V, 50Hz
Working Voltage	DC 24V
Motor	Brushless DC Servo Motor
Power Consumption	100 W
Working Temperature	-20°C - 60°C
Humidity	\leq 90%, No Condensation
Open Signal	Passive signals (Dry contact signals)
Communication	RS485
Pass Rate	\leq 30 person / min
Passage Width	600 mm
Wing Panel	10mm thick tempered glass
IR sensor	14 pair of IR sensors
Housing Material	304 Stainless Steel

Dimension

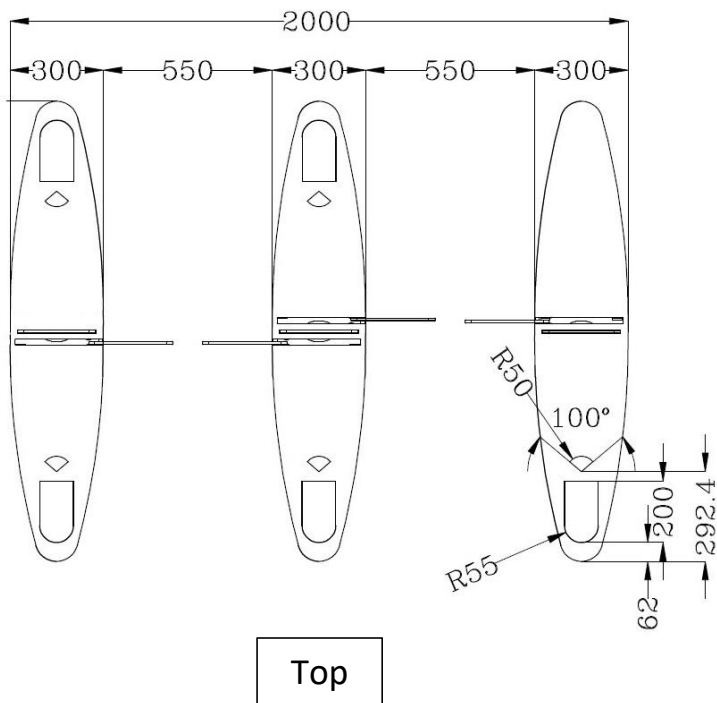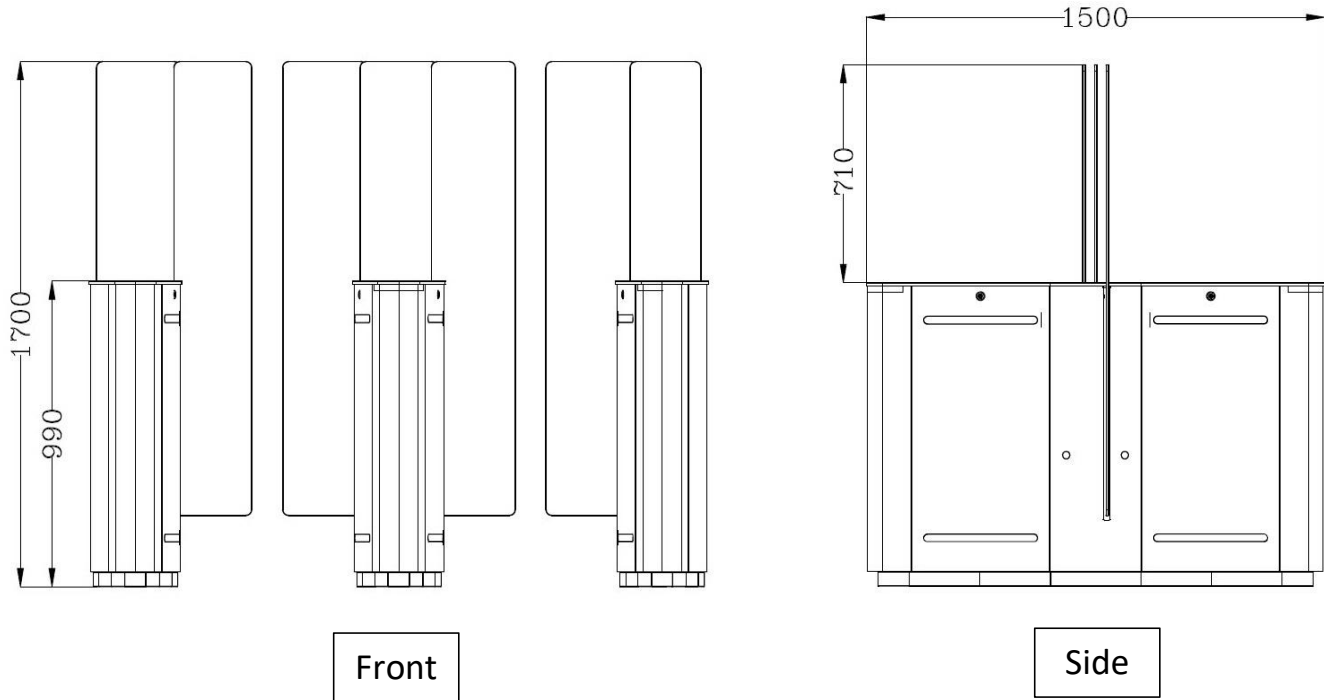

© COPYRIGHT 2020. This documentation served as a reference only. It is subject to change without further notice. All the diagrams and information in this documentation may not be duplicated or modified in any form without the written approval from the management.