





FR320

Stylish and high security



Face recognition reader with fingerprint


Now you can access your door or gate even though both of your hands are full while still verifying your identity at the biometric level, FR320 & FR330 can be mounted beside a door or mounted on top of the turnstile.



FR330

Look nice

Slim elegant design to effectively create your office modern interior.



2

Λ

No need remove mask

You can enjoy the convenience of entering with or without mask.



3 No face, no problem

Fingerprint offer alternative same biometric security level for short children or face with covered cloth. *Only for FR330.



You cannot fake it

Dual lens use IRSense technology to detect "live face" and rejects printed or displayed photos to ensure real genuine identity.











MAG.COM.MY



FR320 & FR330 dual lense with IRSense can verify a real person's face and reject a printed or displayed photo. The modern, compact and slim design can easily fit into any office, factory and bulding. It is suitable for pedestrian gate and door access.

Software

DERFECT MATCH with 🗳 🕬 AGEtegra

MagEtegra ME-ACS software is simple enough for a small office yet powerful enough to manage the access security system of the entire building. It supports 4 types of different time attendance shifts to cater for fixed, flexible or rotating work schedule within acompany.

> 12:00 next day

23:00 next day

> Events record from multiple readers is centralized into a single view in ME-ACS for faster review, search, filter and reporting.

 Using webcam to capture face for user enrollment

Weekl	y, yearly	and	free	shift
time attendance				

Shift Code MS1 Description Morning Sun /Mon / Tue / Wed / Thu / Fri Sat

ne Break Time Overtime (OVT)

ing hours 19:00 hrs

00:00

09:00 next day

18:00 next day

Auto delay Time out if late

DELETE SAVE

Time IN 07:00

Time OUT 15:00

Late In Early Out

Accessories

11 10am to 7pm

24hrs view

Bracket For pedestrian gate

Wall Bracket for FR320 & FR330 For Wall Mount Installation




NVS1230P

12V, 3A switching power supply with timer card and backup battery

EXT H---

Touchless Button TB01 Voltage DC 12V, Current ≤ 20mA

Wiring Diagram

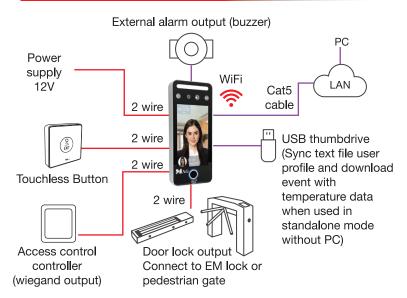

Technical specification

User ID/face capacity	50,000		
Fingerprint capacity	FR330 - 100,000, FR320 - 500,000		
Event record capacity	500,000		
Access mode	5 in 1 - Face + fingerprint, face + card, face + QR code, face + pin *fingerprint not available for FR320		
Face recognition speed	< 0.2 sec		
Relay output	Lock relay dry control output (N.O, N.C and COM) Alarm relay transistor output (-12V)		
Push button input	Yes		
Door sensor input	Dry contact (N.C, N.O and COM)		
Comms interface	TCPIP or WIFI (stability is dependent on wireless signal)		
Wiegand port	WG26/34		
Power required	DC 12V, 2A		
Dimension (LxWxH)	FR330 - 188mm x 80mm x 20mm FR320 - 185mm x 110mm x 20mm		



Authorised Dealer:

Copyright © 2016 Magnet Security & Automation Sdn Bhd. All rights reserved.

All specification, drawing and product info are subject to change without prior notice.